
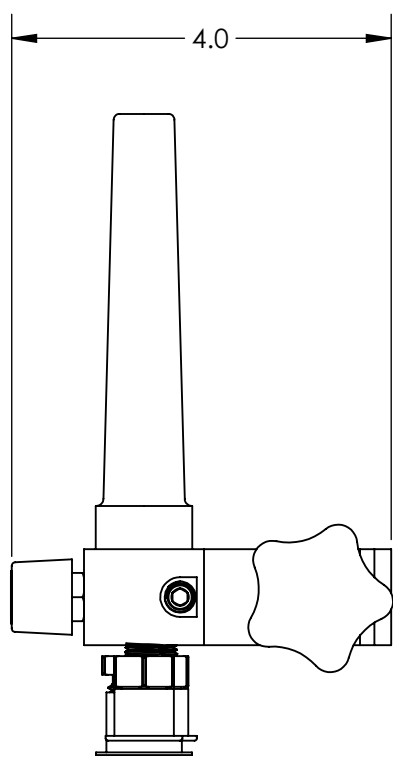


Released

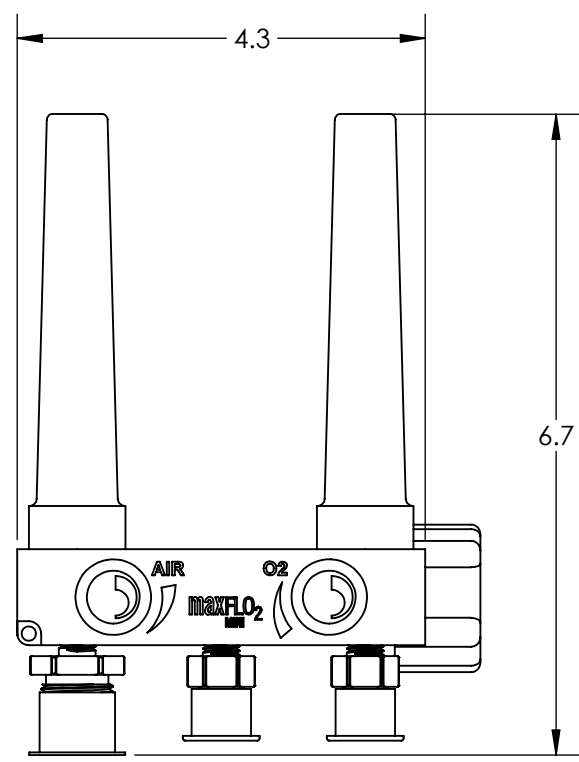

SPECIFICATIONS	
WEIGHT (UNPACKAGED)	1.2 LBS (0.54 Kg)
OXYGEN CONCENTRATION ADJUSTMENT RANGE	21% - 100% OXYGEN
GAS SUPPLY PRESSURE	50 ± 2 PSIG (345 ± kPaG)
OPTIMAL WORKING PRESSURE	50 PSIG (345 kPaG)
MAXIMUM ALLOWABLE PRESSURE	100 PSIG (689 kPaG)
FLOW ACCURACY	FOR FLOWS ≤ 5 LPM: ± 0.5 LPM FOR FLOWS > 5 LPM: ± 10%
OUTLET FLOW RANGE	0.5 LPM AT (20.9% OXYGEN AND 100% OXYGEN) TO 30 LPM (AT 60% OXYGEN)
TEMPERATURE RANGE	59°F - 104°F (15°C - 40°C)
MAXIMUM ALLOWABLE TEMPERATURE	150°F (65°C)
RELATIVE HUMIDITY RANGE	0 - 95% NON-CONDENSING
AMBIENT STORAGE CONDITIONS TEMPERATURE RANGE	5°F - 122°F (-15°C - 50°C)

TP-0001 REV 01

REVISION DETAIL INITIAL RELEASE.	maxtec [®] SALT LAKE CITY, UTAH		SPECIFICATIONS, 0-15 LPM MAXFLO2 MINI	
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND PER ASME Y14.5-2009		SIZE B	DWG. NO. R223P18
	.XX = ± .01 .XXX = ± .005 .XXXX = ± .002	ANGLES ±0° 30'	DRAWN BY: A. DEVLIN	DATE: 10/30/18
		SCALE: 1:2		SHEET 1 OF 1

PROPRIETARY INFORMATION OF MAXTEC